


R-20U

UHF Wideband Antenna

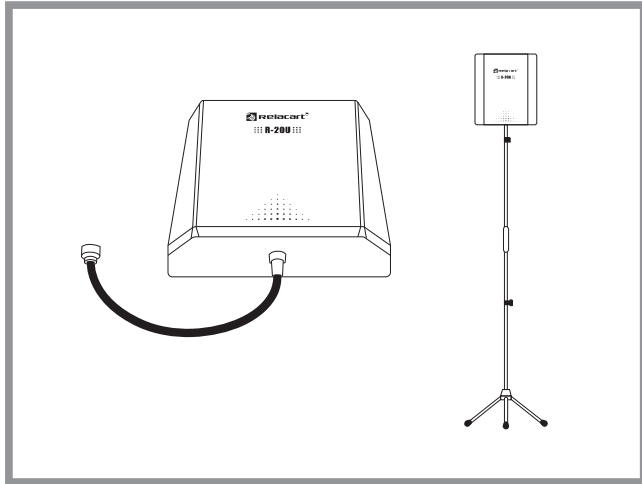

Features:

- Covers 600 ~ 900MHz.
- ABS radome for UV resistant.
- Ideal for directional receiving or transmission indoor or outdoor applications with antenna's booster.
- Easy for set-up and use.

Technical Specifications:

Frequency Range: 600 — 900 MHz

VSWR: ≤ 2.0

Typical Gain: 7 dBi

Vertical Flap Width: 60 °

Horizontal Flap Width: 80 °

Input Impedance: 50 Ω

Polarization: Vertical

Front to Back Ratio: ≥ 25 dB

Max. Power: 50 W


Connector: BNC

Dimensions (mm): 210(H) X 180(W) X 44(D)

Weight (g): 300

Installation: Wall-hung/stand

Direction Diagram:

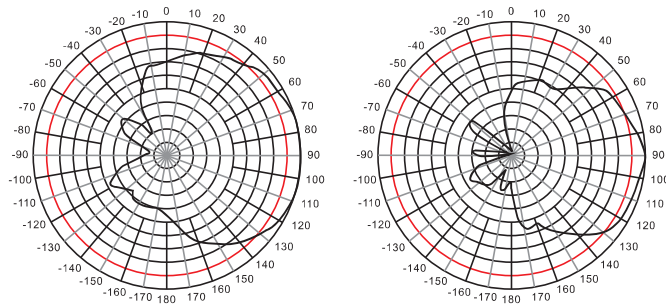

H side

E side

Connection between Antenna and Antenna booster:

