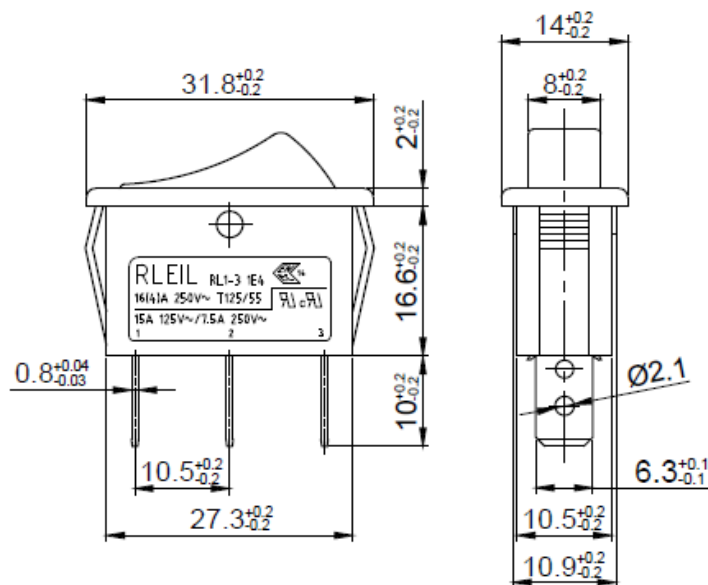



MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: PC UL 94HB
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: AgSnO₂In₂O₃ (10) / Cu

SPECIFICATION

1. RATING: UL C-UL: 15A 125VAC/7.5A 250VAC
ENEC:
16(4)A 250VAC T125/55 1E4
2. CIRCUIT: ON-OFF W/Lamp SPST 3P
3. CONTACT RESISTANCE: 30m OHMS Max
4. INSULATION RESISTANCE: DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE: AC 1500V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION FORCE: 500~700gf
8. OPERATION TEMPERATURE RANGE: -25~+125° C

PANEL HOLE SIZE

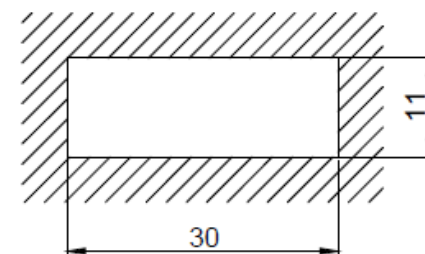

设计	签名	年月日	标准化	签名	年月日
绘图	符辉	18.05.26			
审核	张雪飞				
工艺			批准		

433329061	
TITLE	SERIES
ROCKER SWITCH	FUNCTION ON-OFF W/Lamp
VIEWS TYPE	DRAWING NUMBER