


MKC GEL series is pure GEL battery with 10-15 Years floating design life, it is ideal for standby or frequent cyclic discharge applications under extreme environments. By using strong grids, high purity lead and patented GEL electrolyte, the MKC GEL series offers excellent recovery capability after deep discharge under frequent cyclic discharge use, and it can offers 2 times cyclic life than the standard series. It is suitable for solar & wind system, marine, deep discharge UPS etc.

Use allowed exclusively in industrial environments and for professional applications (EU Reg. 2023/1542).



Outer dimensions (mm) Terminal Type (mm)

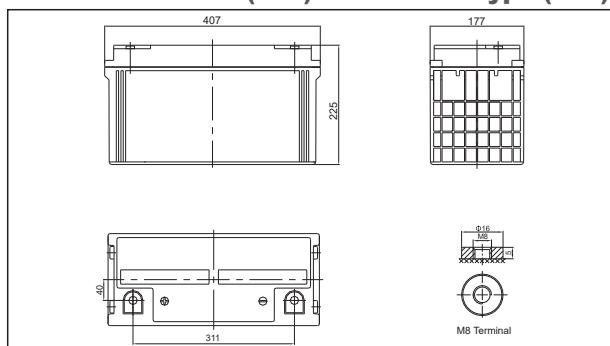

Specifications

Nominal Voltage		12V
Rated capacity (20 hr to 1.75V per cell @ 25°C)		120Ah
Dimensions	Length	407±2mm(16.0 inch)
	Width	177±2mm(6.97 inch)
	Height	225±2mm(8.86 inch)
	Total Height	225±2mm(8.86 inch)
Weight Approx.		36.5 kg(80.47 lbs)±3%

Characteristics


capacity(25°C)	20HR	120.0AH
	10HR	112.0AH
	5HR	92.5AH
Terminal type		M8
Inner resistance (fully charged, 25°C)		Approx. 9.5mΩ
Capacity affected by temperature	40°C	102%
	25°C	100%
	0°C	85%
	15°C	65%
Self-discharge (25°C)	3 months	Remaining Capacity: 91%
	6 months	Remaining Capacity: 82%
	12 months	Remaining Capacity: 65%
Nominal operating temperature		25°C±3°C(77°F±5°F)
Operating temperature range	Discharge	-15°C~50°C(5°F~122°F)
	Charge	-10°C~50°C(14°F~122°F)
	Storage	-20°C~50°C(-4°F~122°F)
Maximum charge current		24.0A
Maximum discharge current		1200A(5 sec.)
Designed life(floating charge)		10~15 years

Construction


Component	Positive plate	Negative plate	Container&Cover	Separator	Electrolyte	Safety value	Terminal
Raw material	Lead dioxide	Lead	ABS UL94-HB, UL94-V0 Optional.	AGM	Gel Sulfuric acid	Rubber	Copper

Constant Current Discharge (Amperes/cell) at 25°C (77°F)											
F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	196.5	159.3	104.5	65.2	39.8	29.8	23.8	20	13.5	11.1	6.25
1.65V	185.7	152.3	100.4	62.9	38.5	28.9	23.2	19.5	13.4	11	6.15
1.70V	170.9	142.7	95.9	60.9	37.3	28.1	22.5	19	13.1	10.8	6.07
1.75V	156.4	132.8	91.7	58.7	36	27.3	22	18.5	13	10.7	6
1.80V	141.6	122.6	87.6	56.4	34.7	26.5	21.3	18	12.7	10.6	5.94
1.85V	115.7	101.7	75.5	50.6	31.8	24.5	19.8	16.8	12	9.94	5.64
Constant Power Discharge (watts/cell) at 25°C (77°F)											
F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	379.5	316.5	215.8	139.2	85.8	64.8	52	43.8	30	24.9	14
1.65V	361.1	304.2	208.9	135.4	83.4	63.2	50.8	42.8	29.6	24.6	13.8
1.70V	342.7	291.9	202.1	131.6	81.1	61.6	49.5	41.8	29.3	24.3	13.6
1.75V	319.3	275.6	195.1	127.5	78.6	60	48.5	40.9	29	24	13.5
1.80V	294.1	258.1	188.4	123.4	76.2	58.4	47.2	40	28.5	23.7	13.4
1.85V	244.6	217.2	163.9	111.3	70.2	54.2	44.1	37.4	26.8	22.4	12.7


Discharge Characteristics Curve

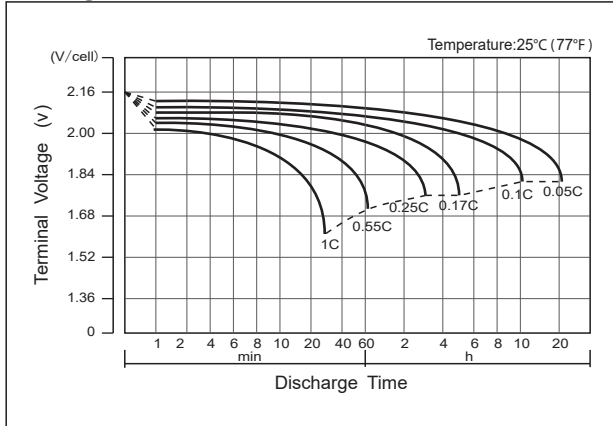


Charge Characteristic Curve for Standby Use

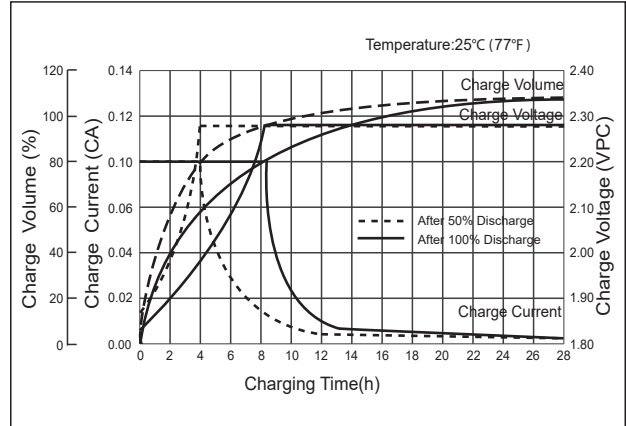


Cycle Life in Relation to Depth of Discharge

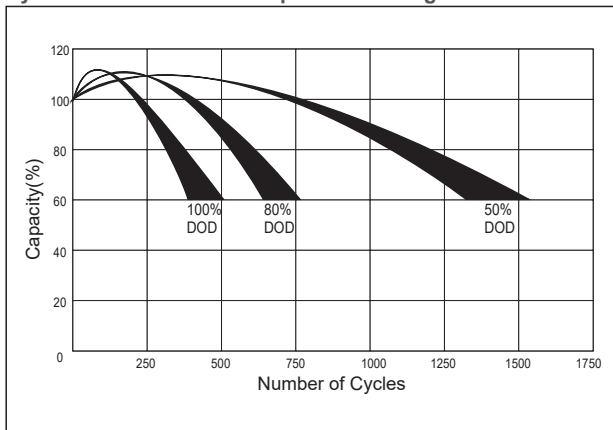


Relationship Between Charging Voltage and Temperature

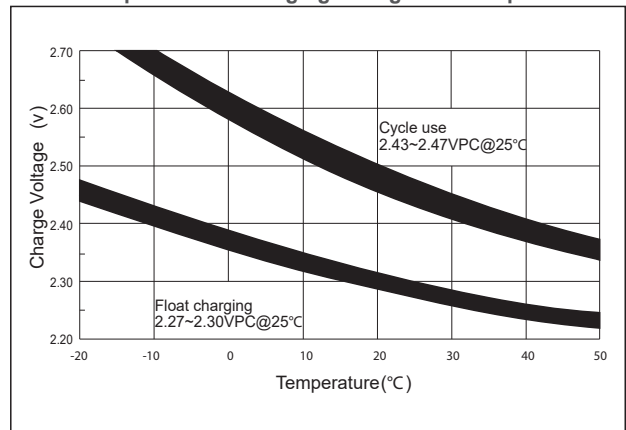


Temperature Effects On Capacity

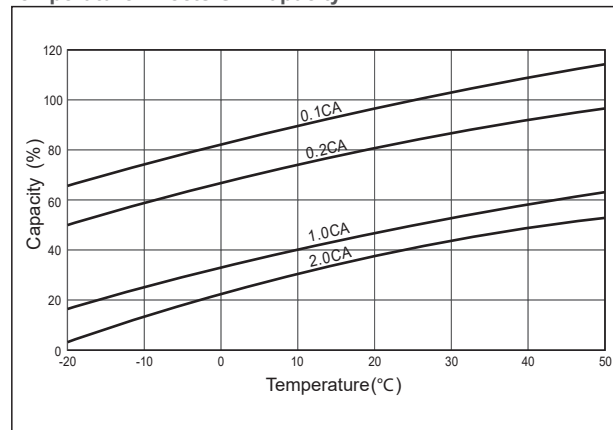

Storage Characteristics

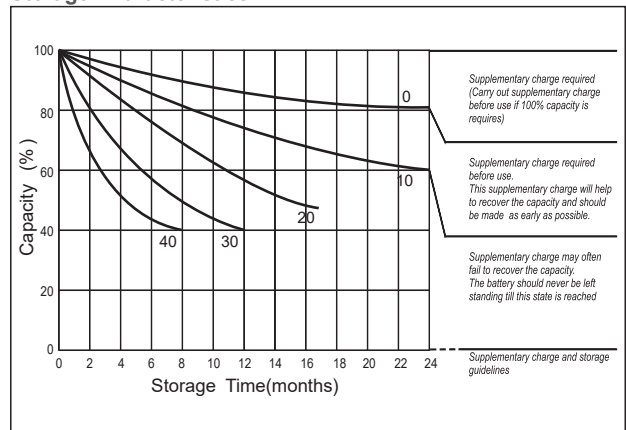

Effect of Temperature on Long Term Life

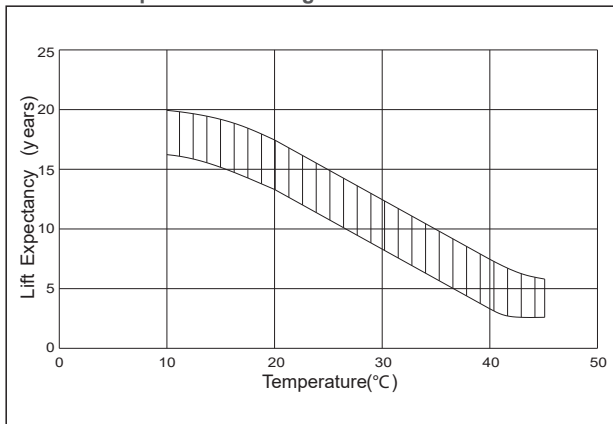

Relationship of OCV And State of Charge

