120x120x32mm (4.72x4.72x1.26in) - 5 blade

Bearing System— 2 Ball Bearing,
Life Expectancy--- Ball 70000hrs@ 25℃
Frame---------- Thermoplastic PBT+30% GF, UL94-V0
Impeller---------- Thermoplastic PBT+15% GF, UL94-V0
Lead Wire---------- UL 1007, AWG 24, 240±10mm, Red(+), Black(-)
Protection---------- Locked rotor protection
IP Grade ---------- Optional

RoHS

Dim: 454x328x295mm
N.W.: 11.2 kgs
G.W.: 13.2 kgs
Q'TY: 40 pcs

FUNCTIONS	PART NUMBER	RATED (VDC)	LABEL CURRENT	ACTUAL CURRENT	POWER (WATTS)	SPEED (RPM)	AIRFLOW (CFM)	AIRFLOW (m³/min)	PRESSURE (mmAq)	PRESSURE (In H²O)	NOISE (dBA)	WEIGHT (Q'TY/CTN)
1b:AS 2a:FG 2b:RD 2c:RDb 6:CL	R1232Y12BPLBxy-5	12 (07~14)	1.924	1.498	17.98	4200	172.22	4.88	16.49	0.65	54.43	280g (40pcs)
	R1232X12BPLBxy-5		1.200	1.056	12.67	3750	154.41	4.37	13.13	0.52	51.63	
	R1232H12BPLBxy-5		0.858	0.600	7.20	3250	134.21	3.80	9.77	0.38	47.92	
	R1232M12BPLBxy-5		0.624	0.420	5.04	2900	119.87	3.39	7.78	0.31	44.90	
	R1232L12BPLBxy-5		0.468	0.280	3.36	2600	107.49	3.04	6.27	0.25	42.07	
	R1232Y24BPLBxy-5	24 (15~27)	0.858	0.640	15.36	4200	172.22	4.88	16.49	0.65	54.43	280g (40pcs)
	R1232X24BPLBxy-5		0.676	0.532	12.76	3750	154.41	4.37	13.13	0.52	51.63	
	R1232H24BPLBxy-5		0.416	0.310	7.44	3250	134.21	3.80	9.77	0.38	47.92	
	R1232M24BPLBxy-5		0.273	0.220	5.28	2900	119.87	3.39	7.78	0.31	44.90	
	R1232L24BPLBxy-5		0.221	0.182	4.37	2600	107.49	3.04	6.27	0.25	42.07	
	R1232Y48BPLBxy-5	48 (36~57)	0.377	0.348	16.70	4200	172.22	4.88	16.49	0.65	54.43	280g (40pcs)
	R1232X48BPLBxy-5		0.273	0.257	12.36	3750	154.41	4.37	13.13	0.52	51.63	
	R1232H48BPLBxy-5		0.195	0.176	8.45	3250	134.21	3.80	9.77	0.38	47.92	
	R1232M48BPLBxy-5		0.143	0.126	6.05	2900	119.87	3.39	7.78	0.31	44.90	
	R1232L48BPLBxy-5		0.104	0.090	4.32	2600	107.49	3.04	6.27	0.25	42.07	
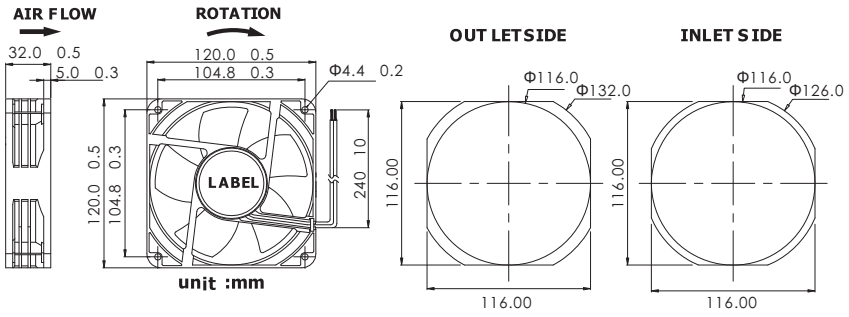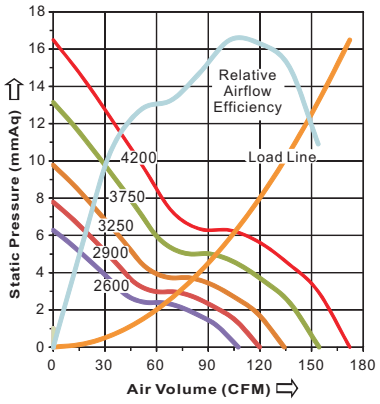
Remark:
1. Part no. suffix: "xy"=Function detail or "x"=Function number, "y"=customer ID
2. R series - STANDARD series:
Uses a 2 coil complementary type drive offering low cost, applicable for higher power demanding applications and have more functions
: