

Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Coupling relay for SIL 3 high/low demand applications, couples digital output signals to the periphery, 1 enabling current path, 1 signal contact, module for safe state off applications, test pulse filter, fuse, plug-in screw connection, 17.5 mm width

Your advantages

- ✓ Narrow 17.5 mm housing
- ✓ Up to SIL 3 according to IEC 61508
- ✓ Forcibly guided contacts according to EN 50205
- ✓ Easy proof test according to IEC 61508 thanks to integrated signal contact
- ✓ Long service life thanks to filtering of controller test pulses
- ✓ With built-in, replaceable fuse in the enabling current path
- ✓ One enabling current path
- ✓ Couples digital output signals from failsafe controllers to I/O devices (valves, etc.) for electrical isolation and power adaptation



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 448352 |
| GTIN | 4046356448352 |

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|----------|
| Width | 17.5 mm |
| Height | 99 mm |
| Depth | 114.5 mm |

Ambient conditions

| | |
|---------------------------------|-------------------------------------|
| Ambient temperature (operation) | -20 °C ... 55 °C (observe derating) |
|---------------------------------|-------------------------------------|

Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Technical data

Ambient conditions

| | |
|--|---|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible humidity (storage/transport) | 75 % (on average, 85% infrequently, non-condensing) |
| Maximum altitude | ≤ 2000 m (Above sea level) |

Input data

| | |
|--|--|
| Rated control circuit supply voltage U_s | 24 V DC -15 % / +10 % |
| Rated control supply current I_s | typ. 55 mA |
| Input voltage range | 20.4 V DC ... 26.4 V DC |
| Power consumption at U_s | typ. 1.32 W |
| Inrush current | max. 100 mA |
| Typ. starting time with U_s | 50 ms |
| Typical release time | 50 ms |
| Recovery time | 1 s |
| Operating voltage display | 1 x yellow LED |
| Protective circuit | Surge protection Suppressor diode, 33 V (A1 - A2) |
| Maximum switching frequency | 0.5 Hz |
| Filter time | max. 5 ms (at A1 in the event of voltage dips at U_s) |
| | max. 2 ms (Test pulse width; high test pulse at A1/A2) |
| | ≥ 100 ms (Test pulse width; high test pulse at A1/A2) |
| | Test pulse rate = 80 x Test pulse width |
| | max. 5 ms (Test pulse width; low test pulse at A1/A2) |
| | ≥ 50 ms (Test pulse rate; low test pulse at A1/A2) |
| | Test pulse rate = 15 x Test pulse width |

Output data

| | |
|---------------------------------------|---|
| Contact type | 1 enabling current path |
| | 1 confirmation current path |
| Contact material | AgCuNi, + 0.2 μm Au |
| Maximum switching voltage | 250 V AC/DC (N/O contact / N/C contact, observe the load curve) |
| Minimum switching voltage | 15 V AC/DC (N/O contact / N/C contact) |
| Limiting continuous current | 5 A (N/O contact, pay attention to the derating) |
| | 100 mA (N/C contact) |
| Maximum inrush current | 5 A (N/O contact) |
| | 100 mA (N/C contact) |
| Inrush current, minimum | 5 mA (N/O contact / N/C contact) |
| Sq. Total current | 25 A ² (observe derating) |
| Interrupting rating (ohmic load) max. | 120 W (24 V DC, τ = 0 ms, N/C contact: 2.4 W) |
| | 192 W (48 V DC, τ = 0 ms, N/C contact: 4.8 W) |
| | 162 W (60 V DC, τ = 0 ms, N/C contact: 6 W) |
| | 66 W (110 V DC, τ = 0 ms, N/C contact: 11 W) |

Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Technical data

Output data

| | |
|--|---|
| | 60 W (220 V DC, $\tau = 0$ ms, N/C contact: 22 W) |
| | 1250 VA (250 V AC, $\tau = 0$ ms, N/C contact: 25 VA) |
| Maximum interrupting rating (inductive load) | 72 W (24 V DC, $\tau = 40$ ms, N/C contact: 2.4 W) |
| | 43 W (48 V DC, $\tau = 40$ ms, N/C contact: 4.8 W) |
| | 41 W (60 V DC, $\tau = 40$ ms, N/C contact: 6 W) |
| | 35 W (110 V DC, $\tau = 40$ ms, N/C contact: 11 W) |
| | 48 W (220 V DC, $\tau = 40$ ms, N/C contact: 22 W) |
| Switching capacity | min. 75 mW |
| Mechanical service life | 10x 10 ⁶ cycles |
| Output fuse | 5 A T fuse (N/O contact) |
| | 150 mA Fast-blow (N/C contact) |

General

| | |
|---|--|
| Relay type | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |
| Nominal operating mode | 100% operating factor |
| Net weight | 155 g |
| Mounting position | any |
| Mounting type | DIN rail mounting |
| Degree of protection | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Housing material | PBT |
| Housing color | yellow |

Connection data

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| pluggable | Yes |
| Conductor cross section solid | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section AWG | 24 ... 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |

Safety-related characteristic data

| | |
|------------------------------|--|
| Stop category | 0 |
| Designation | IEC 61508 - High demand |
| Safety Integrity Level (SIL) | 3 (max. 10% of the entire SIL; diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 90\%$) |
| Designation | IEC 61508 - Low demand |
| Safety Integrity Level (SIL) | 3 (max. 10% of the entire SIL; diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 90\%$) |
| Designation | EN ISO 13849 |
| Performance level (PL) | e (Diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 99\%$) |

Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Technical data

Safety-related characteristic data

| | |
|---|--|
| Category | 4 (Diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 99\%$) |
| Designation | EN 62061 |
| Safety Integrity Level Claim Limit (SIL CL) | 3 (max. 10% of the entire SIL; diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 90\%$) |
| Designation | EN 50156 |
| Safety Integrity Level (SIL) | 3 |

Standards and Regulations


| | |
|--------------------------------|---|
| Designation | Air clearances and creepage distances between the power circuits |
| Standards/regulations | DIN EN 50178/VDE 0160 |
| Rated insulation voltage | 250 V AC |
| Rated surge voltage/insulation | Safe isolation, reinforced insulation 6 kV between the control circuits (A1/A2), (21/22), (13/14) |
| Degree of pollution | 2 |
| Overvoltage category | III |
| Shock | 15g |
| Vibration (operation) | 10 Hz ... 150 Hz, 2g |
| Conformance | CE-compliant |

Environmental Product Compliance


| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Application drawing

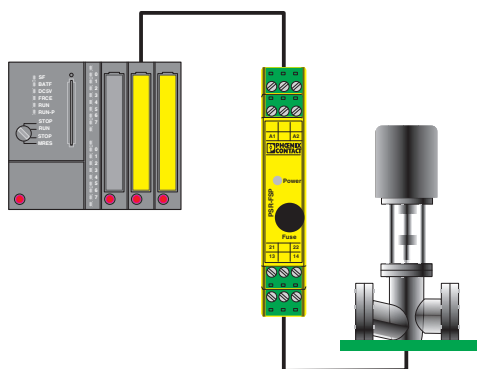


Circuit diagram




Example of electrical isolation of a safety PLC output from the field.

Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Circuit diagram

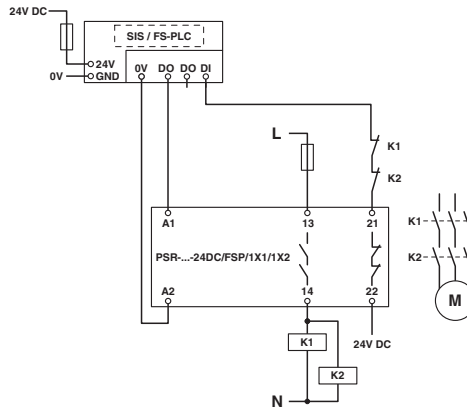

Circuit diagram

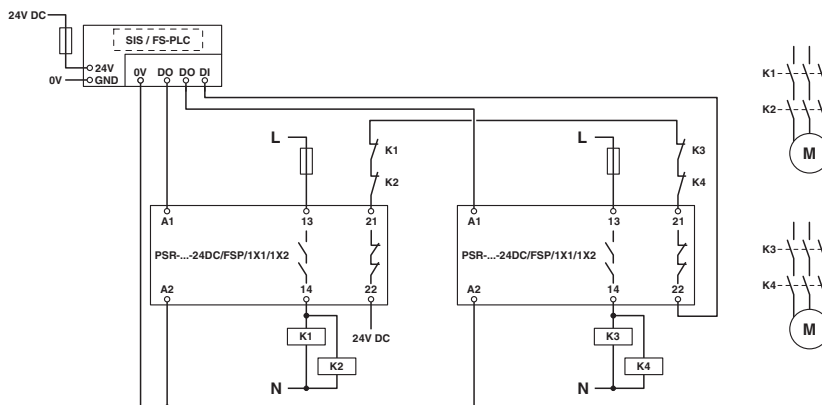

Classifications

eCI@ss

| | |
|---------------|----------|
| eCI@ss 10.0.1 | 27371819 |
| eCI@ss 11.0 | 27371819 |
| eCI@ss 4.0 | 40020600 |
| eCI@ss 4.1 | 40020600 |
| eCI@ss 5.0 | 27371900 |
| eCI@ss 5.1 | 27371900 |
| eCI@ss 6.0 | 27371800 |
| eCI@ss 7.0 | 27371819 |
| eCI@ss 9.0 | 27371819 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001449 |
| ETIM 3.0 | EC001449 |
| ETIM 4.0 | EC001449 |
| ETIM 6.0 | EC001449 |

Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Classifications

ETIM

| | |
|----------|----------|
| ETIM 7.0 | EC001449 |
|----------|----------|

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211901 |
| UNSPSC 7.0901 | 39121501 |
| UNSPSC 11 | 39121501 |
| UNSPSC 12.01 | 39121501 |
| UNSPSC 13.2 | 39121501 |
| UNSPSC 18.0 | 39122205 |
| UNSPSC 19.0 | 39122205 |
| UNSPSC 20.0 | 39122205 |
| UNSPSC 21.0 | 39122205 |

Approvals

Approvals

Approvals

UL Listed / cUL Listed / Functional Safety / EAC / UL Listed / cUL Listed / Functional Safety / EAC / DNV GL / Functional Safety / Functional Safety

Ex Approvals

Approval details

| | | | |
|-----------|--|---|---------------|
| UL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |
|-----------|--|---|---------------|

| | | | |
|------------|--|---|---------------|
| cUL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |
|------------|--|---|---------------|

| | | |
|-------------------|--|------------------|
| Functional Safety | | 968/EZ 365.05/16 |
|-------------------|--|------------------|

| | | |
|-----|--|---------------|
| EAC | | EAC-Zulassung |
|-----|--|---------------|

Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Approvals

| | | | |
|-----------|--|---|---------------|
| UL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |
|-----------|--|---|---------------|

| | | | |
|------------|--|---|---------------|
| cUL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |
|------------|--|---|---------------|

| | | | |
|-------------------|--|--|------------------|
| Functional Safety | | | 968/EZ 365.05/16 |
|-------------------|--|--|------------------|

| | | | |
|-----|--|--|--------------------------|
| EAC | | | RU C- DE.A*30.B.01082 |
|-----|--|--|--------------------------|

| | | | |
|--------|--|---|------------|
| DNV GL | | https://approvalfinder.dnvgl.com/ | TAA00002UC |
|--------|--|---|------------|

| | | | |
|-------------------|--|--|------------------|
| Functional Safety | | | 968/EZ 365.05/20 |
|-------------------|--|--|------------------|

| | | | |
|-------------------|--|--|------------------|
| Functional Safety | | | 968/EZ 365.08/20 |
|-------------------|--|--|------------------|

Phoenix Contact 2021 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>