
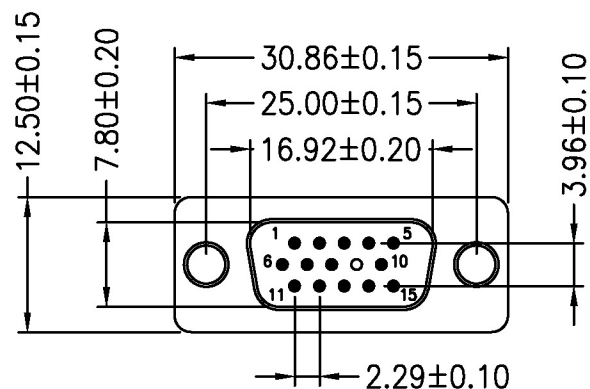
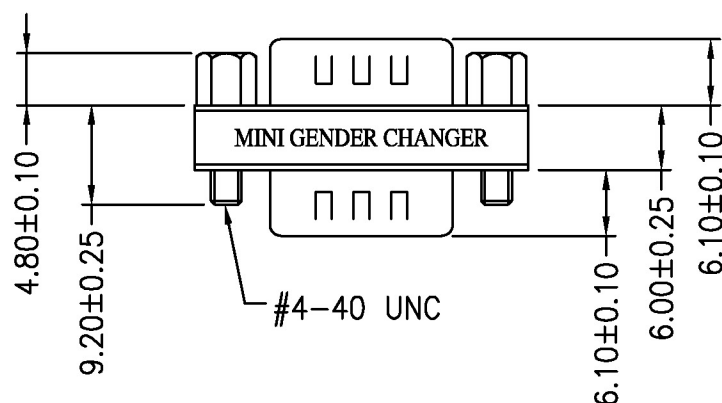
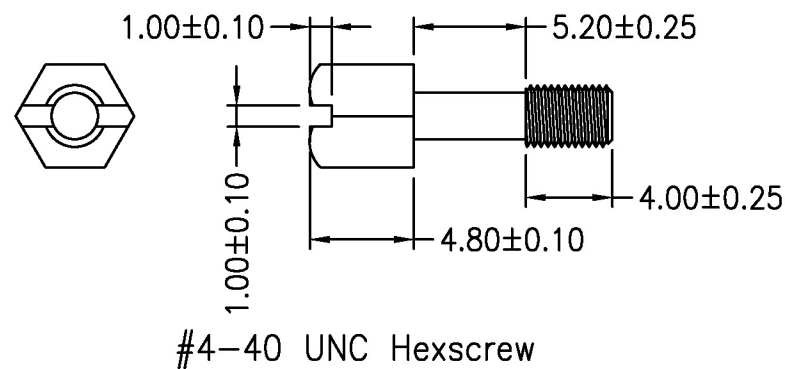


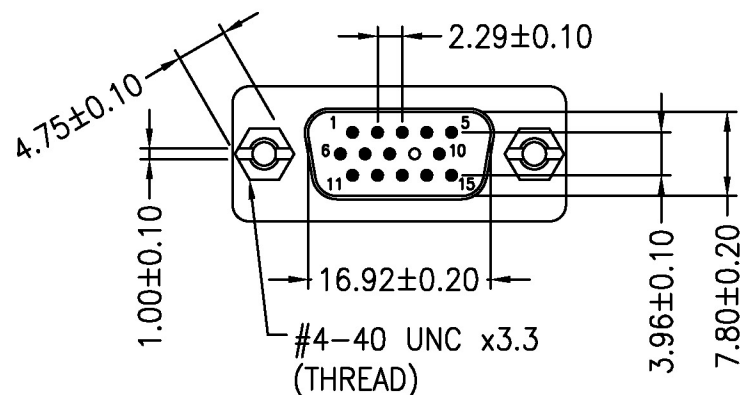

HD15 M/M GENDER CHANGER
PIN OUT : 15Male 15Male

1	—	—	—	—	1
2	—	—	—	—	2
8	—	—	—	—	8
10	—	—	—	—	10
15	—	—	—	—	15
G	—	—	—	—	G

SPECIFICATION:

INSULATOR: PBT Glass fibre reinforced UL 94 V0
CONTACT: Brass
CONTACT PLATING: Gold plated over Nickel
SHELL: Tin plated shell
CURRENT RATING: 3 AMP
DIELECTRIC STRENGTH: 1000V AC for one minute
INSULATOR RESISTANCE: 1000MΩ min at 500V DC
TEMPERATURE: -55° — +105°C

Label: yellow color with black character
One side: MINI GENDER CHANGER
The other side: U.S.A. PATENT 5199906