



**Order symbol:** TAM131308  
**Product nbr:** 5814023  
**Description:** Enclosure, ABS  
**Remarks:** Grey cover

**EAN:** 6418074011459  
**El. number:**  
**Finland:** 3438266  
**Electric No.** 8212045282  
**Denmark:**  
**Electric No. Sweden:** 5814023

Including: Base with PUR gasket, screws for mounting plate/DIN-rail and cover with polyamide cover screws.

Sample photo

| Dimensions:                  |                      |                      | Accessories: |           |                       |
|------------------------------|----------------------|----------------------|--------------|-----------|-----------------------|
| mm:                          | 130                  | 130                  | 75           | MIV 10    | DIN-35 Mounting rail  |
| inch:                        | 5.1                  | 5.1                  | 3.0          | MP 1313   | Mounting plate        |
|                              |                      |                      |              | FP 10674  |                       |
|                              |                      |                      |              | DPS 14553 | Grey sealing plug set |
| Materials:                   |                      |                      |              |           |                       |
| Material:                    | ABS                  |                      |              |           |                       |
| Base colour:                 | RAL 7035 -light grey |                      |              |           |                       |
| Cover screws material:       | Polyamide            |                      |              |           |                       |
| Cover colour:                | RAL 7035 -light grey |                      |              |           |                       |
| Cover screws colour:         | Grey                 |                      |              |           |                       |
| Gasket material:             | Polyurethane         |                      |              |           |                       |
| Temperatures:                |                      |                      |              |           |                       |
| Temperature °C (short term): | -40 ... 80 °C        |                      |              |           |                       |
| Temperature °C (continuous): | -40 ... 60 °C        |                      |              |           |                       |
| Temperature °F (short term): | -40 ... 175 °F       |                      |              |           |                       |
| Temperature °F (continuous): | -40 ... 140 °F       |                      |              |           |                       |
| Accessories:                 |                      |                      |              |           |                       |
| DRM 100                      |                      | DIN-15 Mounting rail |              |           |                       |



#### Rating:

Ingress Protection (EN 60529): IP65  
Impact Resistance (EN 62262): IK07  
Electrical insulation: Totally insulated  
Halogen free (DIN/VDE 0472, Part 815): 1  
Flammability Rating: UL 94 HB  
Glow Wire Test (IEC 695-2-1) °C: 650

#### Certificates:

SGS Fimko

TAM 1313

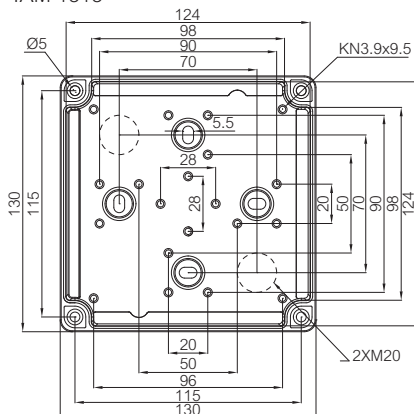

TAM

