

INTERRUTTORI

Switches | Interrupteurs



INTERRUTTORI A BASCULA


Rocker switches | Interrupteurs à bascule

Tensione	Voltage	Tension
250Vac	250Vac	250Vac
Corrente	Current	Courant
16A	16A	16A
150A (Spunto serie 1300)	150A (Inrush 1300 series)	150A (Pic séries 1300)
Contatti	Contacts	Contacts
Ottone argentato faston 6,3mm	Silver-plated brass faston 6,3mm	Laiton argenté faston 6,3mm
Corpo	Body	Corps
Nylon 6.6	Nylon 6.6	Nylon 6.6
Temperatura	Temperature	Température
125°C	125°C	125°C
Cod. omologazione	Approval code	Code d'homologation
Arcoelectric 1500/5500	Arcoelectric 1500/5500	Arcoelectric 1500/5500




Codice	N° poli	Circuito	Foro pannello	Colore bascula
Code	N° poles	Circuit	Panel cut	Rocker colour
Code	N° pôles	Circuit	Découpe de panneau	Couleur bascule
Non luminoso Not Luminous Non Lumineux				
KC1500AABBO (ex I4900)	1	on - off	12x27	■
KC1501AABBV	1	off - mom	12x27	■
KC1510AABBV	1	on - on	12x27	■
KC1520AABBV	1	on - off - on	12x27	■
KC1522AABBV	1	mom - off - mom	12x27	■
KC1500ALBBV	1	on - off	11X30	■
KC1501ALBBV	1	off - mom	11X30	■
KC1510ALBBV	1	on - on	11X30	■
KC1520ALBBV	1	on - off - on	11X30	■
KC1522ALBBV	1	mom - off - mom	11X30	■
High Inrush 150A				
KC1300AABBV	1	on - off	12x27	■
KC1300ALBBV	1	on - off	11X30	■
Luminoso Luminous Lumineux				
KC5503AABRO (ex I4913)	1	on - off	12x27	■
KC5503AABGO (ex I4915)	1	on - off	12x27	■
KC5503AABVY	1	on - off	12x27	■
KC5503ALBRV	1	on - off	11X30	■
KC5503ALBGV	1	on - off	11X30	■
KC5503ALBYV	1	on - off	11X30	■
Accessori Accessories Accessoires				
KW46	Calotta di protezione IP65 Protection cover IP65 Capot de protection IP65			

Dimensioni | Dimensions | Dimensions

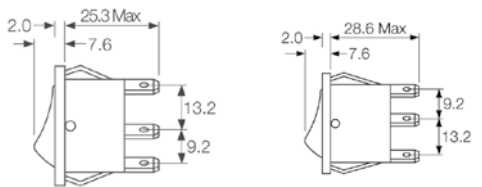

Panel thickness
A 0.75 to 3.3mm
L 0.75 to 2.5mm

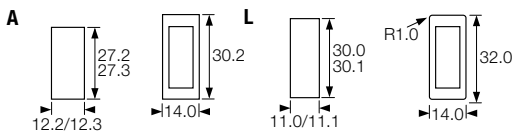

Disponibile in esecuzione antimicrobica
Available in antimicrobial execution
Disponible en technologie antimicrobienne



INTERRUTTORI A BASCULA


Rocker switches | Interrupteurs à bascule

Tensione	Voltage	Tension
250Vac	250Vac	250Vac
Corrente	Current	Courant
16A	16A	16A
150A (Spunto serie 1350)	150A (Inrush 1350 series)	150A (Pic séries 1350)
Contatti	Contacts	Contacts
Ottone argentato faston 6,3mm	Silver-plated brass faston 6,3mm	Laiton argenté faston 6,3mm
Corpo	Body	Corps
Nylon 6.6	Nylon 6.6	Nylon 6.6
Temperatura	Temperature	Température
125°C	125°C	125°C
Cod. omologazione	Approval code	Code d'homologation
Arcoelectric 1550/1350	Arcoelectric 1550/1350	Arcoelectric 1550/1350




Codice	N° poli	Circuito	Foro pannello	Colore bascula
Code	N° poles	Circuit	Panel cut	Rocker colour
Code	N° pôles	Circuit	Découpe de panneau	Couleur bascule
Non luminoso Not Luminous Non Lumineux				
KC1550AABBO (ex I5000)	2	on - off	22x27	■
KC1551AABBV	2	off - mom	22x27	■
KC1560AABBV	2	on - on	22x27	■
KC1570AABBV	2	on - off - on	22x27	■
KC1572AABBV	2	mom - off - mom	22x27	■
KC1550ALBBV	2	on - off	22x30	■
KC1551ALBBV	2	off - mom	22x30	■
KC1560ALBBV	2	on - on	22x30	■
KC1570ALBBV	2	on - off - on	22x30	■
KC1572ALBBV	2	mom - off - mom	22x30	■
High Inrush 150A				
KC1350AABBV	2	on - off	22x27	■
KC1350ALBBV	2	on - off	22x30	■
Luminoso Luminous Lumineux				
KC1553AABRO (ex I5013)	2	on - off	22x27	■
KC1553AABGO (ex I5015)	2	on - off	22x27	■
KC1553AABVY	2	on - off	22x27	■
KC1553ALBRV	2	on - off	22x30	■
KC1553ALBGV	2	on - off	22x30	■
KC1553ALBYV	2	on - off	22x30	■
Accessori Accessories Accessoires				
KW42	Calotta di protezione IP65 Protection cover IP65 Capot de protection IP65			

Dimensioni | Dimensions | Dimensions



Panel thickness
A 0.75 to 3.3mm
L 0.75 to 2.5mm



Disponibile in esecuzione antimicrobica
Available in antimicrobial execution
Disponible en technologie antimicrobienne

