
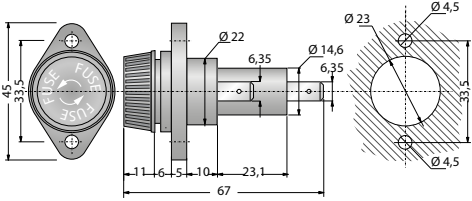















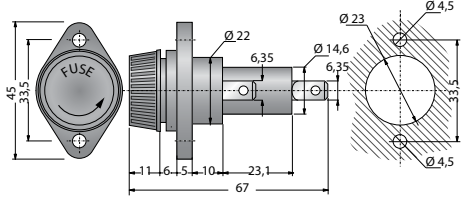


## PORTAFUSIBILI DA PANNELLO 10x38

Panel fuseholders for 10x38 fuses | Porte-fusibles pour montage sur panneau 10x38

P1891	Per fusibili 10x38	For 10x38 fuses	Pour fusibles 10x38	
	<b>30A 600V</b> <b>Contatti</b> Ottone nichelato Faston 6,3 mm a 45° <b>Corpo</b> Resina fenolica con molla di pressione UL94 V1 <b>Tappo</b> Innesto a baionetta	<b>30A 600V</b> <b>Contacts</b> Nickel-plated brass 6,3 mm faston to 45° <b>Body</b> Phenolic resin with pressure spring UL94 V1 <b>Cap</b> Bayonet fixing	<b>30A 600V</b> <b>Contacts</b> Laiton nickelé Faston 6,3 mm à 45° <b>Corps</b> Résine Phénolique à ressort UL94 V1 <b>Capuchon</b> Fixation à baïonnette	
  	 50 pz 50 pcs 50 pces		 pronta in stock en stock	Categoria PC1

P1891/HPS	Per fusibili 10x38	For 10x38 fuses	Pour fusibles 10x38	
	<b>30A 600V*</b> <b>Contatti</b> Ottone argentato Faston 6,3 mm <b>Corpo</b> Bachelite con molla di pressione UL94 HB <b>Tappo</b> Innesto a baionetta <b>Codice omologazione</b> BUSS - HPS	<b>30A 600V*</b> <b>Contacts</b> Silver-plated brass 6,3 mm faston <b>Body</b> Bakelite with pressure spring UL94 HB <b>Cap</b> Bayonet fixing <b>Approval code</b> BUSS - HPS	<b>30A 600V*</b> <b>Contacts</b> Laiton argenté Faston 6,3 mm <b>Corps</b> Bakélite à ressort UL94 HB <b>Capuchon</b> Fixation à baïonnette <b>Code d'homologation</b> BUSS - HPS	
  	 50 pz 50 pcs 50 pces		 pronta in stock en stock	 * 30A saldare - solder - souder 20A faston Categoria PC1

P1892	Per fusibili 10x38	For 10x38 fuses	Pour fusibles 10x38	
	<b>30 A 600 V</b> <b>Contatti</b> Ottone nichelato Faston 6,3 mm <b>Corpo</b> Resina fenolica con molla di pressione UL94-V1 <b>Grado di protezione</b> IP 40 <b>Tappo</b> A vite	<b>30 A 600 V</b> <b>Contacts</b> Nickel-plated brass 6,3 mm faston <b>Body</b> Phenolic resin with pressure spring UL94-V1 <b>Sealing</b> IP 40 <b>Cap</b> Screw fixing	<b>30 A 600 V</b> <b>Contacts</b> Laiton nickelé Faston 6,3 mm <b>Corps</b> Résine Phénolique à ressort UL94-V1 <b>Indice de protection</b> IP 40 <b>Capuchon</b> À vis	
  	 50 pz 50 pcs 50 pces		 pronta in stock en stock	Categoria PC1