

SLA



SLA Battery Range

FIAMM
+ — — — — —

+
FIAMM.COM

F IAMM SLA RANGE OF VALVE REGULATED BATTERIES HAS BEEN DESIGNED FOR APPLICATIONS DEMANDING THE HIGHEST LEVEL OF RELIABILITY AND SECURITY.

FIAMM HIGH INTEGRITY SLA RANGE HAS BEEN DESIGNED FOR THE MOST CRITICAL APPLICATIONS, OFFERING UNSURPASSED PROVEN RELIABILITY, COMPLIANT WITH THE HIGHEST RECOGNISED INTERNATIONAL STANDARDS. SLA USES VRLA TECHNOLOGY WITH 99% INTERNAL RECOMBINATION EFFICIENCY, IS NON-SPILLABLE AND MAINTENANCE FREE THEREFORE REQUIRES NO TOPPING UP OF ELECTROLYTE DURING ITS FLOAT-LIFE. SLA RANGE IS NON-HAZARDOUS FOR AIR/SEA/RAIL/ROAD TRANSPORTATION AND IS 100% RECYCLABLE. SLA HAS A SELF-DISCHARGE RATE LESS THAN 2% PER MONTH, GUARANTEEING LONG SHELF-LIFE.



MAIN APPLICATIONS:



TELECOMMUNICATION



UPS & DATA CENTER



UTILITIES & INDUSTRY



RAILWAYS



OIL & GAS

SPECIFICATIONS

Special lead calcium tin alloy grid is designed to meet the demanding requirements of telecom and power generation markets

VRLA AGM technology using low resistance high microporous fiberglass separators

Leak resistant post seal, threaded female M6/M8/M10 terminals with high conductivity and maximum torque resistance

One-way safety relief valves allow gas to escape and prevent the ingress of oxygen.

Flame arrestors prevent sparks or flames entering the battery


Flame retardant ABS plastic to IEC 707 FV0 and UL94 FV0 (LOI greater than 28%)

Thick walled plastics designed for superior mechanical strength

Heat sealed box to lid weld for superior integrity

Installation in any orientation (excluding permanently inverted)

TECHNOLOGY

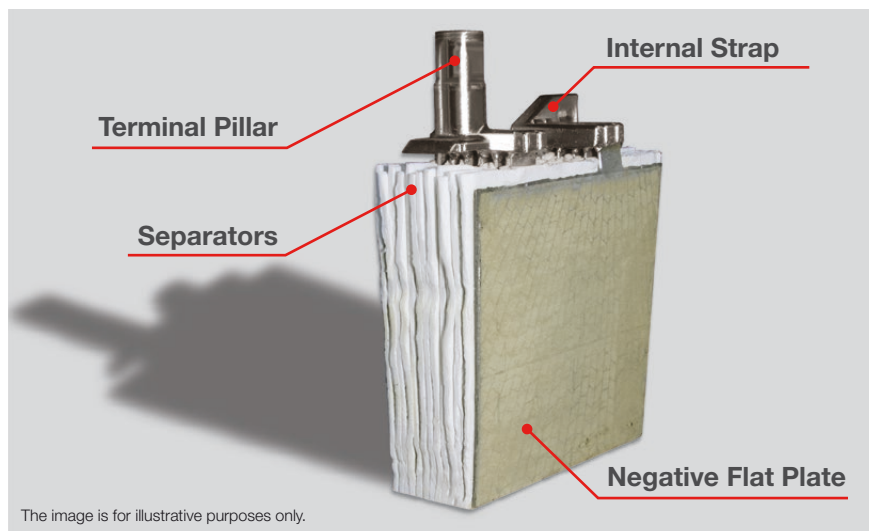

The image is for illustrative purposes only.

FIAMM SLA RANGE USE AGM (ABSORBED GLASS MAT) TECHNOLOGY. THE ELECTROLYTE IS ABSORBED IN FIBERGLASS SEPARATORS WITH 99% INTERNAL GAS RECOMBINATION EFFICIENCY. BLOCS ARE GRANTS NON-SPILLABLE AND MAINTENANCE FREE THEREFORE REQUIRES NO TOPPING UP OF ELECTROLYTE DURING ITS WHOLE LIFE. LOW SELF-DISCHARGE ALLOWS 6 MONTHS SHELF LIFE.

BATTERY TYPE	NOMINAL VOLTAGE (V)	CAPACITY AT 68°F (Ah) 10 HRS TO 1.8 VPC	SHORT CIRCUIT CURRENT (A) IEC 60896 21-22	INTERNAL RESISTANCE (mOhm) IEC 60896 21-22	DIMENSIONS (in.)			WEIGHT (lbs)
					Length	Width	Height	
12 SLA 26	12	24	884	14	6.54	6.89	4.92	21
12 SLA 50 L	12	50	1550	8.3	10.28	6.85	8.62	46
12 SLA 70 L	12	70	2000	6.5	10.28	6.85	8.62	55
12 SLA 80 L	12	80	2144	6.0	11.89	6.85	8.62	64
12 SLA 110 L	12	110	3000	4.2	14.92	6.85	8.62	82
6 SLA 125	6	125	4300	1.40	10.55	6.77	9.06	53
4 SLA 150	4	150	5000	0.70	10.67	6.81	7.95	42
6 SLA 160	6	160	3050	1.96	11.73	7.95	8.90	71
6 SLA 180*	6	180	3400	1.75	15.28	6.81	9.29	77
6 SLA 200	6	200	3700	1.58	9.84	4.92	14.41	79
4 SLA 200	4	200	3800	1.00	9.84	7.95	8.90	57
2 SLA 250	2	250	5900	0.35	10.67	6.81	7.95	37
2 SLA 300	2	300	6300	0.32	10.67	6.81	7.95	42
2 SLA 330	2	330	7500	0.27	8.19	7.68	9.06	49
2 SLA 405/4*	2	405	7600	0.26	9.84	7.95	8.90	60
2 SLA 500*	2	500	9700	0.21	15.28	6.81	9.29	75
2 SLA 580*	2	580	10800	0.19	15.28	6.81	9.29	82
2 SLA 800**	2	820	9700	0.206	10.00	8.27	19.49	141
2 SLA 1000**	2	1025	12000	0.165	10.00	8.27	19.49	163
2 SLA 1500**	2	1500	16000	0.125	10.83	8.27	25.98	231
2 SLA 2000**	2	2000	20000	0.102	14.49	8.58	25.98	302

* The front view is the short side

** This cell must be installed horizontally

ELECTRICAL CHARACTERISTICS

Float Voltage: 2.27 V/cell at 68°F

Boost Voltage: 2.35 V/cell

Float Voltage Compensation with Temperature: -2.5 mV/cell/°C

Self-Discharge at 20°C: <2%/month

STANDARDS

IEC 60896 Part 21 - VRLA methods of testing

IEC 60896 Part 22 - VRLA requirements

BS 6290 Part 4 - specifications for VRLA classification

Telcordia GR-4228 - VRLA battery string certification

BS 6334 / UL 94 V0 / IEC 707 FV0 determination of materials flammability

Bellcore TR-NWT-000766 - VRLA battery generic requirements

UL 1778 - UPS equipment

Eurobat ">12 years VERY LONG LIFE"

CERTIFICATIONS

ISO 9001

Quality Management System

ISO 14001

Environmental Management System

OHSAS 18001

Workplace Safety & Health

ACCESSORIES

RVS


(remote venting system) for IP rated applications which require remote gassing (except for 12FLX150 - 200)

Rack for battery installation
(standard and seismic)

Cabinets for battery installation
(including electrical protections and disconnection)

Battery monitoring systems


DISCHARGE CURVES at different current / final voltage (at 77°F)

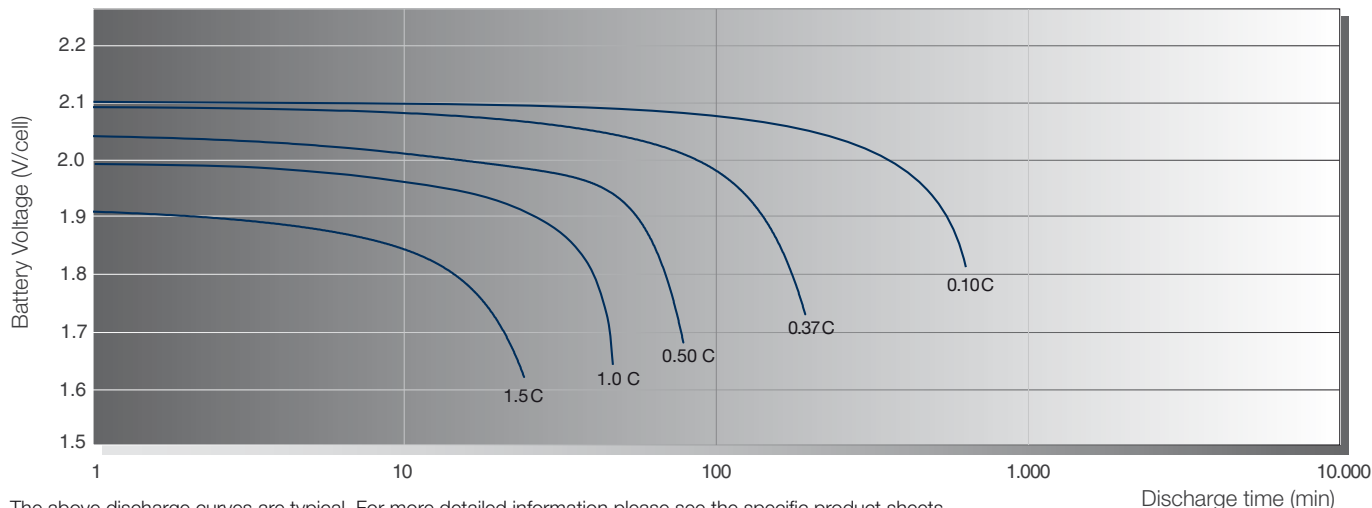

The above discharge curves are typical. For more detailed information please see the specific product sheets.


TYPICAL CHARGE CURVES

Battery Voltage and Charge Time for Standby Use (at 77°F)

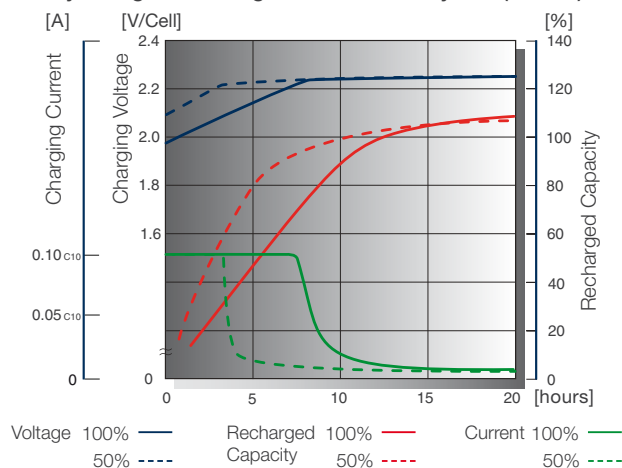

STORAGE

Capacity loss during storage at various temperatures

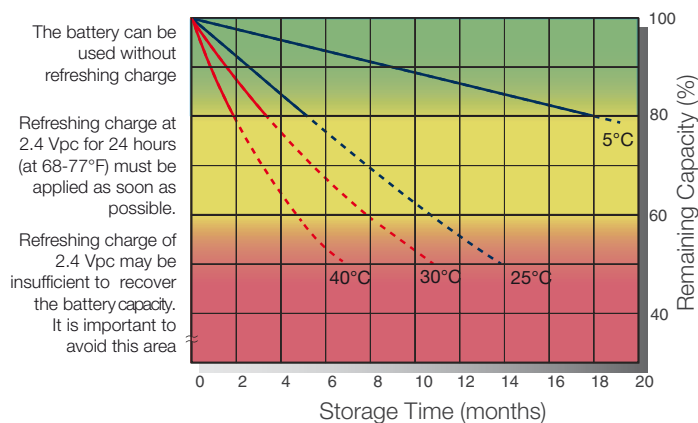

The battery can be used without refreshing charge

Refreshing charge at 2.4 Vpc for 24 hours (at 68-77°F) must be applied as soon as possible.

Refreshing charge of 2.4 Vpc may be insufficient to recover the battery capacity. It is important to avoid this area

FIAMM

Headquarters
FIAMM Energy Technology S.p.A.
Viale Europa, 75
36075 Montecchio Maggiore (VI) - Italy
Tel. +39 0444 709311
Fax +39 0444 694178

A Hitachi Group Company

info.standby@fiamm.com
www.fiamm.com

f fiamm.batteries
t fiambatteries
y youtube.com/user/FIAMMvideo