


UT600 SERIESInductance Capacitance Meters





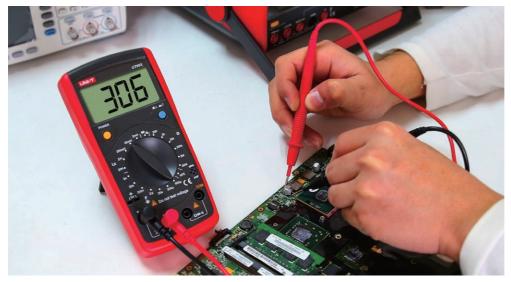

UT600 series digital inductance capacitance meters are used to test resistors, capacitors and inductors. They can also be used to measure transistor parameters. These meters can be used to check electronic components in electronic labs, production lines, maintenance facilities and schools.

UT603

	Range	UT601	UT603
Resistance (Ω)	$20\Omega/200\Omega/2k\Omega/20k\Omega/200k\Omega/2M\Omega/20M\Omega/200M\Omega/2000M\Omega$	±(0.8%+1)	
	200Ω/2kΩ/20kΩ/200kΩ/2ΜΩ/20ΜΩ		±(0.8%+1)
Capacitance (F)	200pF/2nF/20nF/200nF/2uF/20uF/200uF/2mF/20mF	±(0.5%+10)	
	2nF/20nF/200nF/2uF/20uF/200uF/600uF		±(1%+5)
Inductance (H)	2mH/20mH/200mH/2H/20H		±(2%+8)
Features			
Display count		2000	2000
Manual range		√	√
Diode		√	√
Transistor		√	√
Continuity buzzer		√	√
Low battery indication		√	√
Power	9V battery (6F22)		
Display	61mm x 32 mm		
Product color	Red and grey		
Product net weight	UT601: 310g, UT603: 312g		
Product size	172mm x 83mm x 38mm		
Standard accessories	Battery, test leads with alligator clips, holster		
Standard individual packing	Gift box, English manual		
Standard quantity per carton	20pcs		
Standard carton measurement	450mm x 330mm x 340mm (0.099CBM per standard carton)		
Standard carton gross weight	9.6kg		