


FOR APPROVAL

DIMENSIONS(mm)

ΦD	10
L	16
α	2.0
P	5.0
Φd	0.6

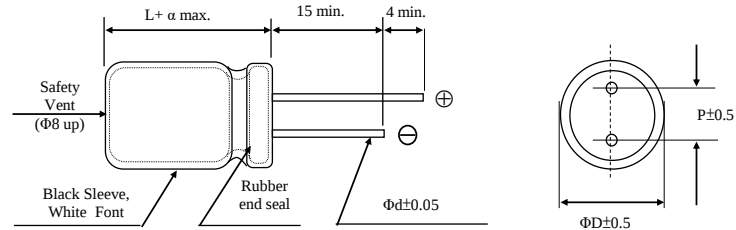

Customer:		Electrolytic Capacitors								Su'scon	
Melchioni		SK Series								Code	
Electric Characteristics:											
Melchioni	Su'scon	Cap. (uF)	Cap. Tol.	Rate Volt.	Surge Volt.	Oper. Temp.	Nominal Case Size	Leakage Current	D.F. MAX	R.C 120 Hz	Load Life
P/N	P/N		(%)	(V-DC)	(V-DC)	(°C)	D*L(mm)	Max (uA)	(%)	(mA rms)	(hours)
	SK006M222G16PKKKS00R	2200	±20	6.3	8	105	10*16	138	26	730	2000
REMARKS:											
1. Leakage Current Test:		6.3V~100V at 20℃ for 2 minutes; 160V~500V at 20℃ for 3 minutes;									
2. Operating temperature:		6.3V~250V -40℃~ +105℃ ;350V~500V -25℃~ +105℃ ;									
3. Dissipation Factor Test:		at 20℃, 120 Hz.									
4. Capacitance Test:		at 20℃, 120 Hz.									
5. Ripple Current Test:		at 105℃, 120 Hz ;									
6. Load Life:		2000hours,subjected to DC voltage with the rated ripple current is applied at 105℃.									
Capacitance Change:		Within±20% of initial value;									
tanδ:		200% or less of initial specified value;									
		According to the specified value which stated in the catalogue to do the life testing;									
Leakage Current:		Initial specified value or less;									
7. Shelf Life:		According to the specified value which stated in the catalogue to do the life testing;									
		exposing them for 1000 hours 105℃ without voltage applide. Before the measurement,									
		the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.									
Capacitance Change :		Within±20% of initial value;									
tanδ:		200% or less of initial specified value;									
Leakage Current:		Initial specified value or less.									
8. when have characteristic requested :		Load life & shelf life test and etc. , judgment standard reference to our catalogue.									

●SPECIFICATION

Voltage Range 工作電壓範圍	6.3V~100V						160V~500V					
Leakage Current 洩漏電流	I≤0.01CVor3(μA),Which is greater.(After 2 minutes application of working voltage)						I≤0.03CV+20(μA),(After 3 minutes application of working voltage)					
Dissipation Factor 散逸因素（損失角） (tan δ)	Measurement Frequency:120Hz. Temperature:20℃											
	Rate Voltage(V)	6.3	10	16	25	35	50	63	80	100	160~250	350~500
	tanδ（MAX）	0.24	0.20	0.16	0.15	0.12	0.10	0.09	0.08	0.08	0.20	0.25
	When nominal capacitance over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF .											
Standards 參照標準	JIS C-5101-4(IEC 60384)											

●RIPPLE CURRENT COEFFICIENTS


Frequency coefficient of allowable ripple current					
Rated Voltage(V)	Capacitance(uF)	Frequency(Hz)			
		50	120	1K	≥ 20k
≤ 100	<100	0.75	1.00	1.40	1.50
	100~470	0.75	1.00	1.20	1.30
	>470	0.85	1.00	1.10	1.15
≥ 160	0.47~470	0.75	1.00	1.10	1.50

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5℃ rise.
 When long life performance is required in actual use, the rms ripple current has to be reduced.
 Production date:2023.07.04

FOR APPROVAL

DIMENSIONS(mm)

ΦD	5
L	11
α	1.0
P	2.0
F ^{+0.8} _{-0.2}	5.0
Φd	0.5

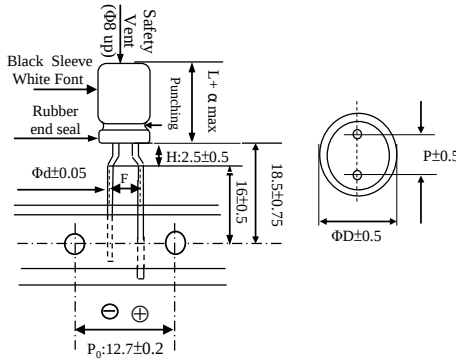

Customer:		Electrolytic Capacitors								Su'scon	
Melchioni		SK Series								Code	
Electric Characteristics:											
Melchioni	Su'scon	Cap.	Cap.	Rate	Surge	Oper.	Nominal	Leakage	D.F.	R.C	Load
P/N	P/N	(uF)	Tol.	Volt.	Volt.	Temp.	Case Size	Current	MAX	120 Hz	Life
		(%)	(%)	(V-DC)	(V-DC)	(°C)	D*L(mm)	Max (uA)	(%)	(mA rms)	(hours)
	SK063M100D11PE89P50R	10	±20	63	79	105	5*11	6.3	9	58	2000
	SK063M220D11PE89P50R	22	±20	63	79	105	5*11	13	9	75	2000

REMARKS:

- Leakage Current Test:** 6.3V~100V at 20°C for 2 minutes; 160V~500V at 20°C for 3 minutes;
- Operating temperature:** 6.3V~250V -40°C~ +105°C ;350V~500V -25°C~ +105°C ;
- Dissipation Factor Test:** at 20°C, 120 Hz.
- Capacitance Test:** at 20°C, 120 Hz.
- Ripple Current Test:** at 105°C, 120 Hz ;
- Load Life:** 2000hours,subjected to DC voltage with the rated ripple current is applied at 105°C.
- Capacitance Change:** Within±20% of initial value;
- tanδ:** 200% or less of initial specified value;
- Leakage Current:** According to the specified value which stated in the catalogue to do the life testing;
- Initial specified value or less;**
- 7. Shelf Life:** According to the specified value which stated in the catalogue to do the life testing;
- exposing them for 1000 hours 105°C without voltage applide. Before the measurement,**
- the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.**
- Capacitance Change :** Within±20% of initial value;
- tanδ:** 200% or less of initial specified value;
- Leakage Current:** Initial specified value or less.
- 8. when have characteristic requested :** Load life & shelf life test and etc. , judgment standard reference to our catalogue.

●SPECIFICATION

Voltage Range 工作電壓範圍	6.3V~100V						160V~500V					
Leakage Current 洩漏電流	I ≤ 0.01CVor3(μA),Which is greater.(After 2 minutes application of working voltage)						I ≤ 0.03CV+20(μA),(After 3 minutes application of working voltage)					
Dissipation Factor 散逸因素（損失角） (tan δ)	Measurement Frequency:120Hz. Temperature:20℃											
	Rate Voltage(V)	6.3	10	16	25	35	50	63	80	100	160~250	350~500
	tanδ（MAX）	0.24	0.20	0.16	0.15	0.12	0.10	0.09	0.08	0.08	0.20	0.25
	When nominal capacitance over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF .											
Standards 參照標準	JIS C-5101-4(IEC 60384)											

●RIPPLE CURRENT COEFFICIENTS

Frequency coefficient of allowable ripple current

Rated Voltage(V)	Capacitance(uF)	Frequency(Hz)			
		50	120	1K	≥20k
≤ 100	<100	0.75	1.00	1.40	1.50
	100~470	0.75	1.00	1.20	1.30
	>470	0.85	1.00	1.10	1.15
≥ 160	0.47~470	0.75	1.00	1.10	1.50

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.

Production date:2023.07.04