

Voltage measuring transducers - MACX MCR-VDC - 2906242

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



MACX MCR voltage transducers for DC voltages of 0... (+/-) 20 V DC to 0... (+/-) 660 V DC, output signal (+/-) 10 V / (+/-) 20 mA

Your advantages

- ✓ Adjustable voltage ranges
- ✓ Bidirectional output signals
- ✓ 3-way isolation
- ✓ ZERO/SPAN adjustment $\pm 20\%$
- ✓ Tool-free parameterization of measured values
- ✓ Teach-in configuration of the measured value range



Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 050928
GTIN	4055626050928

Technical data

Note

Utilization restriction	1
-------------------------	---

Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C (non-condensing)
Maximum altitude	≤ 2000 m

Voltage measuring transducers - MACX MCR-VDC - 2906242

Technical data

Input data

Input voltage range	-550 V DC ... 550 V DC
Input resistance	5500 k Ω
Input voltage range	-370 V DC ... 370 V DC
Input resistance	3700 k Ω
Input voltage range	-250 V DC ... 250 V DC
Input resistance	2500 k Ω
Input voltage range	-170 V DC ... 170 V DC
Input resistance	1700 k Ω
Input voltage range	-120 V DC ... 120 V DC
Input resistance	1200 k Ω
Input voltage range	-80 V DC ... 80 V DC
Input resistance	800 k Ω
Input voltage range	-54 V DC ... 54 V DC
Input resistance	800 k Ω
Input voltage range	-36 V DC ... 36 V DC
Input resistance	800 k Ω
Input voltage range	-24 V DC ... 24 V DC
Input resistance	240 k Ω
Nom. voltage	$\pm$ 660 V DC

Output data

Output name	Voltage output
Voltage output signal	-10 V ... 10 V
Max. output voltage	$\leq$ 11 V
Load/output load voltage output	$>$ 10 k Ω
Ripple	50 mV
Output name	Current output
Current output signal	-20 mA ... 20 mA
Max. output current	$\leq$ 22 mA
Load/output load current output	$<$ 500 Ω

Power supply

Nominal supply voltage	24 V DC (-20 % ... +25 %)
Supply voltage range	19.2 V DC ... 30 V DC
Max. current consumption	$<$ 60 mA

Connection data

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14

Voltage measuring transducers - MACX MCR-VDC - 2906242

Technical data

Connection data

Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Stripping length	8 mm
Screw thread	M3
Connection technology	Screw connection

General

Maximum transmission error	< 1 % (of measuring range end value)
Maximum temperature coefficient	< 0.015 %/K
Alignment zero	± 20 %
Alignment span	± 20 %
Step response (10-90%)	< 16 ms
Test voltage	5.3 kV AC (50 Hz, 1 min.)
Degree of pollution	2
Standards/regulations	IEC 61010-1
	IEC 61010-2-030
Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 61000-6-4
Noise immunity	EN 61000-6-2 When being exposed to interference, there may be minimal deviations.
Color	gray
Mounting position	any
Assembly instructions	Can be aligned with spacing = 10 mm
Conformance	CE-compliant
UL, USA/Canada	UL 61010 Listed

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 61000-6-4
Standards/regulations	IEC 61010-1
	IEC 61010-2-030
Low Voltage Directive	Conformance with Low Voltage Directive
Conformance	CE-compliant
UL, USA/Canada	UL 61010 Listed


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Voltage measuring transducers - MACX MCR-VDC - 2906242

Block diagram

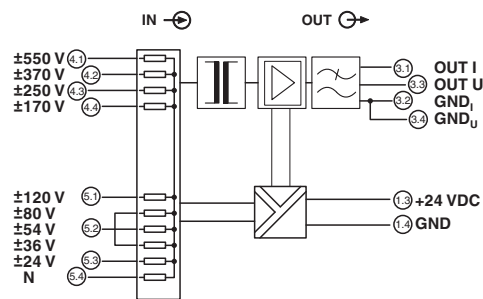

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC / cULus Listed

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 330267
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 330267
EAC			RU C- DE.A*30.B.01082
cULus Listed			

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>